# A4LD

## **Automatic Transmission**



## **Options**

• Slip Yoke with 25 teeth for size 1310 u-joints

## **Approximate Dimensions**

Width

14.7 inches (373 mm)

Height

14.8 inches (376 mm)

Face to Mount

25.5 inches (648 mm)

Length

34.6 inches (879 mm)

Face to Control Lever

16.3 inches (414 mm)

Bolt Pattern Ford LRG-425

## Warranty

Contact Ford Power Products for warranty details.

## **Specifications**

Transmission Type . . . . . . . . . . . . . Hydraulically Controlled

Converter Stall Torque

Multiplication ............2.56:1

Maximum Fluid Temp ......250 degrees F (121 degrees C)

Installation Angle .........5.5 degrees

Transmission Fluid . . . . . . . . Mercon

Engine Usage .....Ford LRG-425

#### **Gear Ratios**

## **Gear Range Selection**

Available Positions .......... P-R-N-D-3-2-1

#### **Transmission Controller**

## **Standard Features / Benefits**

Manual First with engine braking

Manual Second with engine braking

**Engine Braking Drive Position** with engine braking in first, second and third gears when the gear selector is in the "3" position


**Free-Wheeling Drive Position** with no engine braking in first, second or third gears when the gear selector is in the "D" position

Built-in Neutral Safety Start and Reverse Light Switch

**Over-Speed Downshift Protection** preventing damage when manually shifting into first or second gear


Manual Kick-Down Lever providing lower gear selection at higher vehicle speeds



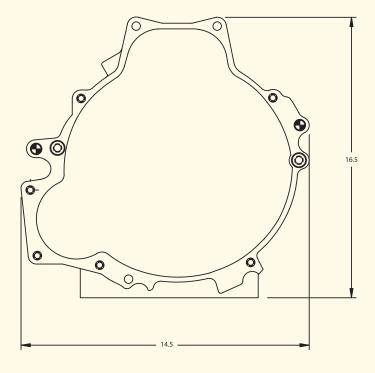

Front End View

Measurements

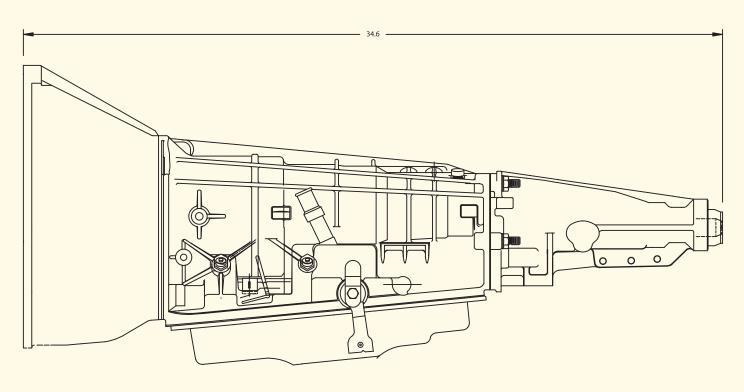

**Left Side View** 



Ford Power Products 15700 Lundy Parkway Drive

Suite 200 Dearborn, Michigan 48126 Phone: 1-800-833-4773 Fax: 1-313-619-2600 Ford Power Products

Trafford House, Station Way Basildon, Essex, SS16 5XX, England Phone: 44 (0)1268 704181 Fax: 44 (0)1268 702121 Specifications may vary with application and are subject to change without notice.